



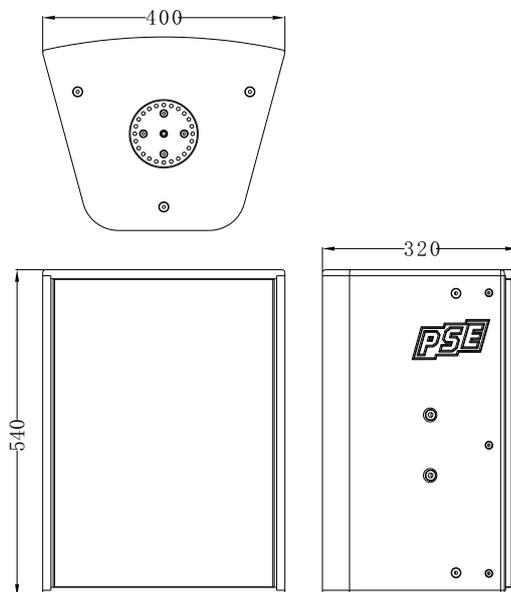

IPX-12

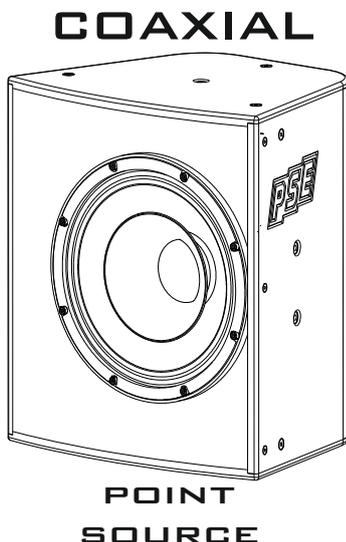

| specification | |
|---|---------------|
| model | IPX-12 |
| rated impedance | 8 Ω |
| operation mode | passive |
| power handling capacity passive AES/peak* | 500W / 1800W* |
| available frequency response** | 65Hz-20kHz |
| max. sound pressure level*** | 134dB |
| directivity (h x v) | 60° x 40° |
| LF-transducer rated size | 12" |
| LF-transducer voice coil diameter | 76mm/3" |
| LF-transducer magnet structure | ferrite |
| HF-compression driver rated size (VC) | 45mm/1.75" |
| HF-compression throat diameter | 1" |
| HF-compression magnet structure | ferrite |
| dimension h/w/d in mm | 540/400/320 |
| weight | 21kg |

Features IPX-12

- 1x12"/1.75" coaxial speaker
- 12" transducer 76mm /3" voice coil
- 12" transducer ferrite magnet
- compression driver 1.75"/45mm voice coil
- compression driver ferrite magnet
- high frequency horn 1" throat
- horn directivity 60° x 40°
- 6 + 12 M8 mounting points
- 1 M10 mounting point
- 1 multi gauge plate 360° / 15° steps
- 2 Neutrik speakon 4-pin
- bass link function
- high-mid link function
- perforated steel front grill powder coated
- acoustic foam 10mm
- wood housing class A MDF 15mm
- polyurea (PU) high scratch proof coating
- optional regular painting black or white

Appliance IPX-12

- high-mid unit for fix installation
- background music

Application IPX-12

- discotheque, clubs, bars, entertainment
- meeting rooms

* peak 10ms, with TD-8000 amplifier and IPX-12 max controller setup
 ** -10dB with IPX-12 FR controller setup
 ***1m free field, pink noise, crest factor 10dB, with TD-8000 and IPX-12 SPL controller setup

