


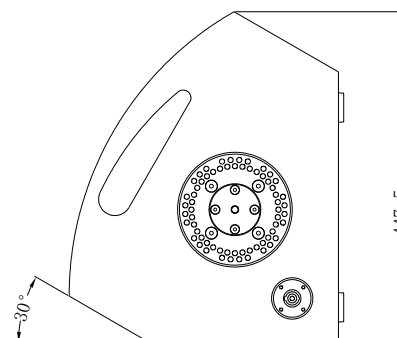
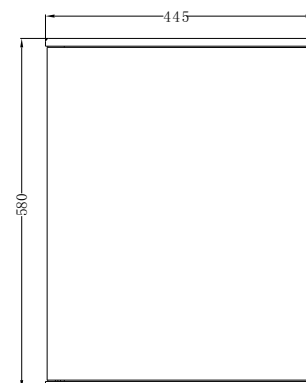


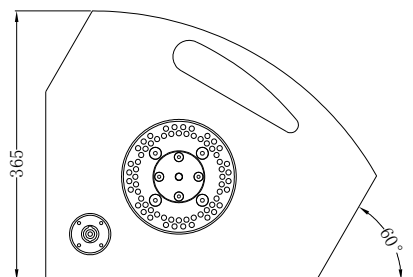

CX-15pro

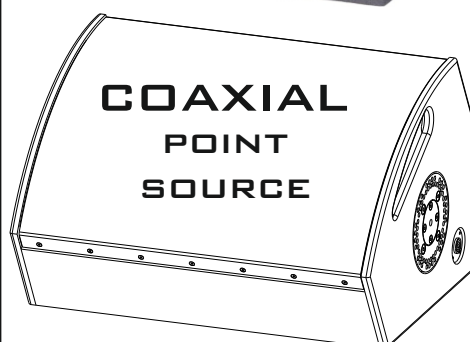

specification


model	CX-15 pro
rated impedance	8 Ω
operation mode	bi-amp
power handling capacity bi-amp AES LF+HF	450W +70W
power handling capacity bi-amp peak* LF+HF	1800W + 200W
available frequency response**	50Hz-20kHz
max. sound pressure level***	139dB
directivity horn (h x v)	40° x 60°
LF-transducer rated size	15"
LF-transducer voice coil diameter	76mm/3"
LF-transducer magnet structure	neodymium
HF-compression driver rated size (VC)	75mm/3"
HF-compression throat diameter	1.4"
HF-compression magnet structure	neodymium
dimension h/w/d in mm	580/445/406
weight	20kg

* peak 10ms, with TD-8000 amplifier and CX-15pro max controller setup


** -10dB with CX-15pro FR controller setup

***1m free field, pink noise, crest factor 10dB, with TD-8000 and CX-15pro SPL controller setup


small variety of wide range for bass cabinets extension



Disco and Pub



Live-music and touring



Touring and installation

Features CX-15pro

- 1x15"/3" coaxial speaker neodymium
- 15" transducer 76mm /3" voice coil
- 15" transducer neodymium magnet
- compression driver 3"/75mm voice coil
- compression driver neodymium magnet
- high frequency horn 1.4" throat
- horn directivity 40° x 60°
- multifunction housing
- wedge angle 30° and 60°
- 2 M10 mounting points
- 2 multi gauge plate 360° / 5° steps
- tripod (pole mounting) flange
- 4 Neutrik speakon 4-pin
- speakon terminals at 3 sides of the cabinet
- bass link function
- high-mid link function
- perforated steel front grill powder coated
- acoustic foam 4mm behind front grill
- wood housing plywood 15mm
- polyurea (PU) high scratch proof coating

Appliance CX-15pro

- high-mid unit for fix installation
- floor monitor
- near fill
- delay line

Application CX-15pro

- discotheque, clubs, bars, entertainment
- live events, live entertainment