


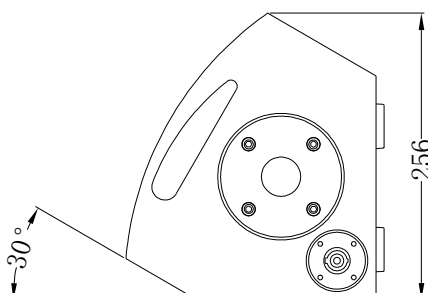
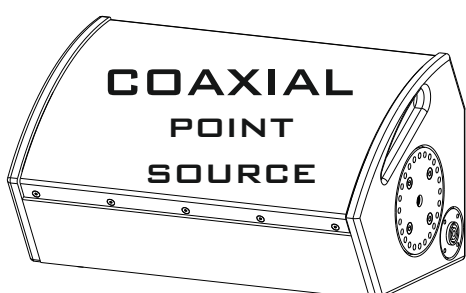


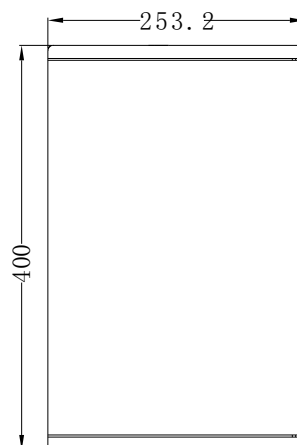

# CX-8

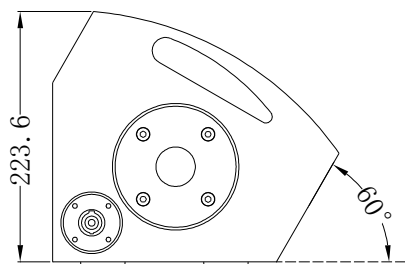

| specification                             |              |
|---|--------------|
| model                                     | CX-8         |
| rated impedance                           | 8 $\Omega$   |
| operation mode                            | passive      |
| power handling capacity passive AES/peak* | 300W / 900W* |
| available frequency response**            | 68Hz-20kHz   |
| max. sound pressure level***              | 125dB        |
| directivity (h x v)                       | 80° conical  |
| LF-transducer rated size                  | 8"           |
| LF-transducer voice coil diameter         | 52mm/2"      |
| LF-transducer magnet structure            | ferrite      |
| HF-compression driver rated size (VC)     | 34mm/1.35"   |
| HF-compression throat diameter            | 1"           |
| HF-compression magnet structure           | ferrite      |
| dimension h/w/d in mm                     | 400/253/240  |
| weight                                    | 10kg         |

\* peak 10ms, with TD-8000 amplifier and CX-8 max controller setup

\*\* -10dB with CX-8 FR controller setup

\*\*\*1m free field, pink noise, crest factor 10dB, with TD-8000 and CX-8 SPL controller setup

## Features CX-8

- 1x8"/1.35" coaxial speaker
- 8" transducer 52mm / 2" voice coil
- 8" transducer ferrite magnet
- compression driver 1.35"/34mm voice coil
- compression driver ferrite magnet
- high frequency horn 1" throat
- horn directivity 80° conical
- multifunction housing
- wedge angle 30° and 60°
- 1 M10 mounting points
- 1 multi gauge plate 360° / 15° steps
- tripod (pole mounting) flange
- 4 Neutrik speakon 4-pin
- speakon terminals at 3 sides of the cabinet
- bass link function
- high-mid link function
- perforated steel front grill powder coated
- acoustic foam 4mm behind front grill
- wood housing plywood 15mm
- polyurea (PU) high scratch proof coating


## Appliance CX-8

- high-mid unit for fix installation
- floor monitor
- near fill
- delay line

## Application CX-8

- discotheque, clubs, bars, entertainment
- live events, live entertainment


## small variety of wide range for bass cabinets extension



Disco and Pub



Live-music and touring



Touring and installation