



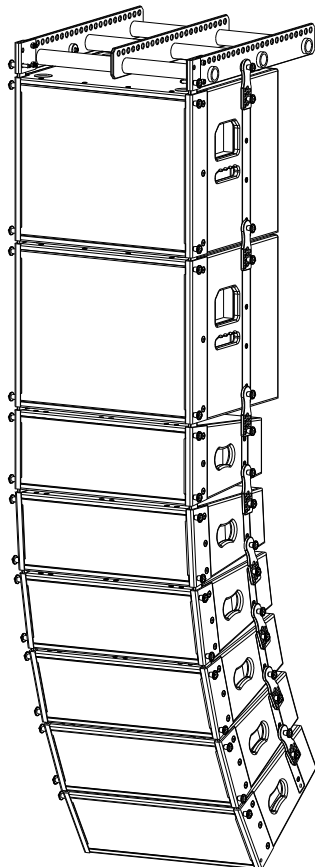

VECTOR-6

Line Array

2x6.5"/1.75" passive



Features Vector-6

- 2x6.5" speaker ferrite (1.35"voice coil)
- 1x1.75" (45mm) compression driver ferrite
- high frequency planar wave guide device
- wave guide directivity h110°/v10°
- horizontal symmetrical directivity
- curving angles 0°-10° in 1° steps
- 4-point rigging structure
- 2 Neutrik speakon 4-pin
- speaker signal link function
- perforated steel front grill powder coated
- acoustic foam 4mm behind front grill
- wood housing 15mm and 18mm plywood
- polyurea (PU) high scratch proof coating
- optional regular painting black or white

Appliance Vector-6

- line array unit for mobile and touring PA
- line array unit for fix installation




Application Vector-6

- live events, live entertainment
- stadium broadcasting,
- discotheque and mobile disco event
- meeting halls broadcast system



SYSTEM 530

for stacking and rigging

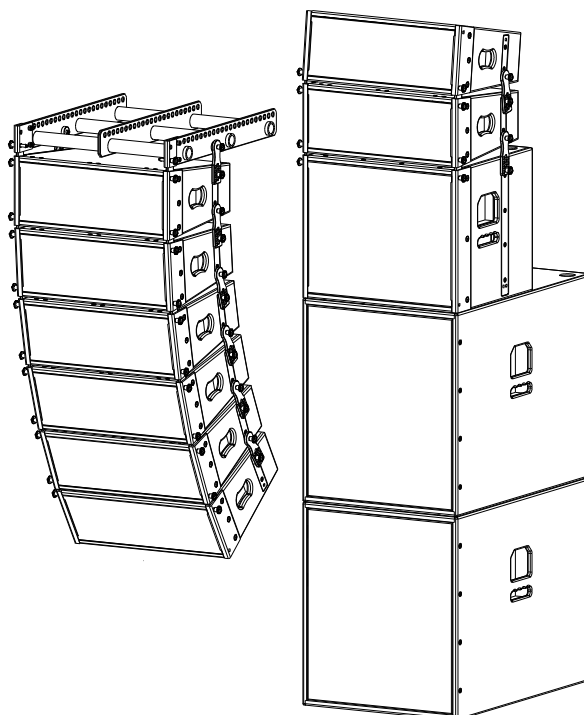

specification

model	Vector-6
rated impedance (optional)	16Ω (8Ω)
operation mode	passive
power handling capacity passive AES/peak*	300W / 900W*
available frequency response**	80Hz-20kHz
max. sound pressure level***	127dB
directivity h x v****	110°x10°
LF-transducer rated size	2x6.5"
LF-transducer voice coil diameter	1.35"/35mm
LF-transducer magnet structure	ferrite
HF-compression driver rated size (VC)	1.75"/45mm
HF-compression driver throat diameter	1"
HF-compression magnet structure	ferrite
dimension w/h/d in mm	530/210/300
weight	16kg

extended system components


LB-15 MK-II* Low-Mid extension (1x15")

B-18 RV* 18" subwoofer (1x18")

B-18 subwoofer (1x18")

VB-218 subwoofer (2x18")

*with rigging hardware

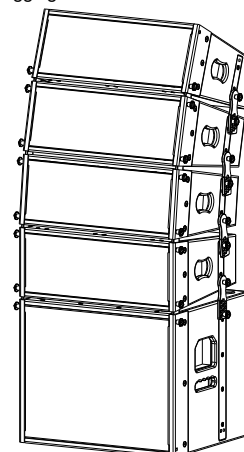

* peak 10ms, with TD-8000 amplifier and Vector-6 max controller setup

** -10dB with Vector-6 FR controller setup

***1m free field, pink noise, crest factor 10dB, with TD-8000 and Vector-6 SPL controller setup

****system vertical directivity depends on quantity and curving of Vector-6 cabinets